

07/01/98
JC551 U.S. PTO
09/108447

PATENT APPLICATION

Docket No.: 97-677
Date: July 1, 1998

Assistant Commissioner for Patents
Washington, D.C. 20231
ATTN: BOX PATENT APPLICATION

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of

Inventor(s): GERALD N. COLEMAN; DENNIS L. ENDICOTT; and EDWARD A. JAKUSH

For (title): HIGH STABILITY FUEL COMPOSITIONS

Enclosed are:

- ☒ 0 sheet(s) of drawings. (FORMAL)
- ☐ An Assignment of the invention to _____
- ☒ Declaration not enclosed.
- ☐ Material information pursuant to 37 CFR § 1.56.

The filing fee has been calculated as shown below:


CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS	21 - 20 =	1	x \$22	22.00
INDEPENDENT CLAIMS	1 - 3 =	0	x \$82	0.00
			BASIC FEE	\$790.00
			FILING FEE	\$812.00

- ☒ The Commissioner is hereby authorized to charge any fees under 37 CFR 1.16 and 1.17 which may be required during the pendency of the application to Deposit Account No. 03-1129. Two copies of this sheet are enclosed.
- ☐ It is expressly requested that the U.S. Patent and Trademark Office commence national processing of the above-entitled international application under the provisions of PCT Article 23(2) and 35 USC 371(f).

Correspondence Address:

CATERPILLAR INC.
Attn: Robert J. Hampsch
Intellectual Property Department - AB6490
100 N.E. Adams Street
Peoria, IL 61629-6490



Attorney or Agent of Record
Robert J. Hampsch
Reg. No. 36,155
Caterpillar Inc.

"Express mail" mailing label number E1883569182US

Date of deposit July 1, 1998

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Nancy J. Wagler (Reg. No. N/A)
(Name of person mailing application)


(Signature of person mailing application)

Description
HIGH STABILITY FUEL COMPOSITIONS

Background of the Invention

5 The present invention relates to reduced nitrogen oxide (NOx) emission fuel compositions, more particularly, to high stability fuel compositions for use in internal combustion engines.

10 Nitrogen oxides comprise a major irritant in smog and are believed to contribute to tropospheric ozone which is a known threat to health. Environmental considerations and government regulations have increased the need to reduce NOx production. One problem with using diesel-fueled
15 engines is that the relatively high flame temperatures reached during combustion increase the tendency for the production of nitrogen oxides (NOx). These are formed from both the combination of nitrogen and oxygen in the combustion chamber and from the
20 oxidation of organic nitrogen species in the fuel. Various methods for reducing NOx production include the use of catalytic converters, engine timing changes, exhaust recirculation, and the burning of "clean" fuels. These methods are generally too
25 expensive and/or too complicated to be placed in widespread use. The rates at which NOx are formed is related to the flame temperature. It has been shown that a small reduction in flame temperature can result in a large reduction in the production of nitrogen
30 oxides.

 One approach to lowering the flame temperature is to inject water in the combustion zone, however; this requires costly and complicated changes in engine design. An alternate method of using water
35 to reduce flame temperature is the use of aqueous fuels incorporating both water and fuel into an emulsion. Gravitational phase separation (during

storage) and high temperature high pressure/shear flow rate phase separation (in a working engine) of these emulsions present the major hurdle preventing their commercial use.

5 Additional problems that may occur from long-term use of aqueous fuels include engine corrosion, engine wear, or precipitate deposition which may lead to engine problems and ultimately to engine inoperability. Problematic precipitate
10 depositions include coalescing ionic species resulting in filter plugging and inorganic post combustion deposits resulting in turbo fouling. Another problem related to aqueous fuel compositions is that they often require substantial engine modifications, such
15 as the addition of in-line homogenizers, thereby limiting their commercial utility.

The present invention addresses the problems associated with the use of aqueous fuel compositions by providing a stabile, inexpensive fuel emulsion with
20 reduced NOx and particulate emissions.

Summary of the Invention

In general, the invention features a substantially ashless fuel composition that comprises
25 hydrocarbon petroleum distillate, purified water, and an additive composition. The fuel composition preferably is in the form of an emulsion which is stable at storage temperatures, as well as, at temperatures and pressures encountered during use,
30 such as, during recirculation in a compression ignited engine.

The amount of the hydrocarbon petroleum distillate preferably is between about 43 weight percent and about 70 weight percent of the fuel
35 composition, more preferably between about 63 weight

percent and about 68 weight percent of the fuel composition.

The amount of purified water preferably is between about 28 weight percent and about 55 weight percent of the fuel composition, more preferably between about 30 weight percent and about 35 weight percent of the fuel composition. The purified water preferably contains no greater than about 50 parts per million calcium and magnesium ions, and no greater than about 20 parts per million silicon. More preferably, the purified water has a total hardness of less than 10 parts per million and contains no greater than about 2 parts per million calcium and magnesium ions, and no greater than about 1 part per million silicon.

The additive composition preferably includes a surfactant and may also include one or more additives such as lubricants, corrosion inhibitors, antifreezes, ignition delay modifiers, cetane improvers, stabilizers, rheology modifiers, and the like. Individual additive ingredients may perform one or more of the aforementioned functions.

The preferred emulsion has an average droplet diameter of less than about 10 microns.

25

Description of Preferred Embodiments

Preferred fuel compositions include hydrocarbon petroleum distillates and water in the form of an emulsion. The preferred emulsion is a stable system with as little surfactant as possible. A stable emulsion is desirable because a separate water and fuel phases will lead to combustion problems. Stability means no substantial phase separation in long term storage under typical storage conditions, for example, up to about three months. The fuel emulsions have the high temperature and high pressure

stability required to maintain the emulsion under operating conditions.

The fuel composition is preferably ashless. For the purposes of this disclosure "ashless" means
5 that, once the fuel components are combined, the level of particulates and coalescing ionic species is sufficiently low to allow long-term operation of the internal combustion engine (for example, substantially continuous operation for three months) without
10 significant particulate and coalescing ionic species deposition on engine parts, including valve seats and stems, injectors and plug filters, and post-combustion engine parts such as the exhaust trains and turbo recovery units. The level of ash is determined by
15 monitoring water purity, exhaust emissions, and by engine autopsy. Engine autopsy, including dismantlement and metallurgical analysis, is also used to analyze corrosion and wear.

Preferred compositions include about 43% to
20 about 70% by weight hydrocarbon petroleum distillate, more preferably about 63% to about 68% hydrocarbon petroleum distillate. The amount and type of hydrocarbon petroleum distillate is selected so that the kilowattage per gallon provided by combusting the
25 fuel composition is sufficiently high so that the engine need not be derated. Examples of suitable hydrocarbon petroleum distillates include kerosene, diesel, naphtha, and aliphatics and paraffinics, used alone or in combination with each other, with diesel
30 being preferred, for example, EPA Emissions Certification Diesel Fuel and standard number 2 diesel. Suitable hydrocarbon petroleum distillates include high paraffinic, low aromatic hydrocarbon petroleum distillates having an aromatic content of
35 less than about 10%, preferably less than about 3%.

95T020 248060

5 The water component of the fuel composition
functions to reduce NO_x and particulate emissions.
The greater the amount of water, the greater the
decrease in NO_x emissions. The current upper limit of
10 water is about 55%, above which the burning
characteristics of the fuel make it's use impractical
under normal conditions, i.e., with an acceptable
amount of additives and relatively inexpensive
hydrocarbon petroleum distillate. The preferred amount
15 of purified water is between about 28 weight percent
and about 55 weight percent of the fuel composition,
more preferably between about 30 weight percent and
about 35 weight percent of the fuel composition.

20 The water is preferably purified such that
it contains very low concentrations of ions and other
impurities, particularly calcium ions, magnesium ions,
and silicon. This is desirable because impure water
contributes to ashing and engine deposit problems
after long-term use, which can lead to wear,
25 corrosion, and engine failure. The purified water
preferably contains no greater than about 50 parts per
million calcium and magnesium ions, and no greater
than about 20 parts per million silicon. More
preferably, the purified water has a total hardness of
30 less than 10 parts per million and contains no greater
than about 2 parts per million calcium and magnesium
ions, and no greater than about 1 part per million
silicon. Suitable purification techniques are well-
known and include distillation, ion exchange
35 treatment, and reverse osmosis, with reverse osmosis
being preferred having a lower cost and ease of
operation.

The fuel composition preferably includes one
or more additives, for example, surfactants,
35 lubricants, corrosion inhibitors, antifreezes,
ignition delay modifiers, cetane improvers,

stabilizers, rheology modifiers, and the like. The amount of additive selected is preferably sufficiently high to perform its intended function and, preferably sufficiently low to control the fuel composition cost.

5 The additives are preferably selected so that the fuel composition is ashless.

In a preferred embodiment the water functions as the continuous phase of an emulsion, acting as an extender and carrier of the hydrocarbon petroleum distillate. As the continuous phase, the lower useable limit of water is theoretically about 26%, below which point the physics of the system inhibits maintaining water as the continuous phase.

10

The preferred composition includes

15 surfactant which facilitates the formation of a stable emulsion of the hydrocarbon petroleum distillate within the continuous water phase. A preferred surfactant is a surfactant package comprised of one or more surfactants in combination with one or more

20 surfactant stabilizers. Preferred surfactants are ashless and do not chemically react with other components in the fuel composition. Examples of suitable surfactants include nonionic, anionic and amphoteric surfactants. Preferred fuel compositions

25 include about 0.3% to about 1.0% by weight, preferably about 0.4% to about 0.6% total surfactant.

Examples of suitable components for the surfactant package include alkylphenolethoxylates, alcohol ethoxylates, fatty alcohol ethoxylates, and

30 alkyl amine ethoxylates. Of these, the alkylphenolethoxylates and alcohol ethoxylates are preferred. Of the alkylphenolethoxylates, polyethoxylated nonylphenols having between 8 and 12 moles of ethylene oxide per mole of nonylphenol are

35 preferred. An example nonylphenol, 2,6,8-Trimethyl-4-nonyloxypolyethyleneoxyethanol is commercially

available, e.g., from Union Carbide under the trade designation "TERGITOL TMN-10". Another nonylphenol ethoxylate NP-9 available from Shell under the trade designation "NP-9EO", added at 1000-3000 ppm. A
5 preferred alcohol ethoxylate is a C₁₁ alcohol ethoxylate with 5 moles of ethylene oxide per mole of alcohol commercially available from Shell as "Neodol N1-5 Surfactant". Additional preferred surfactant components include, for example, Pluronic 17R-2
10 [octylphenoxypolyethoxyethanol] (a block copolymer produced by BASF) added at 100 - 300 ppm; CA-720 an octylphenol aromatic ethoxylate available from Rhone-Poulenc as "Igepal CA-720" added at 1000-3000 ppm; and X-102 an ethoxylated alkyl phenol available from Union
15 Carbide as "TRITON X-102" added at 1000 - 2000 ppm.

The fuel composition preferably includes one or more lubricants to improve the slip of the water phase and for continued smooth operation of the fuel delivery system. The amount of lubricant generally
20 ranges from about 0.04% to 0.1% by weight, more preferably from 0.04% to 0.05% by weight. Suitable lubricants include a combination of mono-, di-, and tri-acids of the phosphoric or carboxylic types, adducted to an organic backbone. The organic backbone
25 preferably contains about 12 to 22 carbons. Examples include mixed esters of alkoxyated surfactants in the phosphate form, and di- and tri-acids of the Diels-Alder adducts of unsaturated fatty acids. The carboxylic types are more preferred because of their
30 ashless character. A specific example of a suitable lubricant is Diacid 1550™ (Atrachem Latol 1550 or Westvaco Chemicals Diacid 1550), which is preferred due to its high functionality at low concentrations. The Diacid 1550 also has nonionic surfactant
35 properties. Neutralization of the phosphoric and carboxylic acids, preferably with an alkanolamine,

reduces possible corrosion problems caused as a result of the addition of the acid. Suitable alkanolamine neutralizers include amino methyl propanol, triethanolamine, and diethanolamine, with amino methyl
5 propanol (available from Angus Chemical under the trade designation "AMP-95") being preferred. Preferred compositions include about 0.05 to 0.4% by weight neutralizer, more preferably about 0.06%.

The fuel composition may also include one or
10 more corrosion inhibitors, preferably one that does not contribute a significant level of inorganic ash to the composition. Aminoalkanoic acids are preferred. An example of a suitable corrosion inhibitor is available from the Keil Chemical Division of Ferro
15 Corporation under the trade designation "Synkad 828". Preferred compositions include about 0.05% by weight corrosion inhibitor.

The fuel composition may also include one or more ignition delay modifiers, preferably a cetane
20 improver, to improve fuel detonation characteristics, particularly where the fuel composition is used in compression ignited engines. Examples include nitrates, nitrites, and peroxides. A preferred ignition delay modifier is 2-ethylhexylnitrate (2-
25 EHN), available from Ethyl Corporation under the trade designation "HiTec 4103". Ammonium nitrate can also be used as a cetane improver with the additional benefit of possessing emulsion stabilization properties. Preferred compositions include about 0.1%
30 to 0.4% by weight ignition delay modifier.

An antifreeze may also be included in the fuel composition. Organic alcohols are preferred. Specific examples include methanol, ethanol, isopropanol, and glycols, with methanol being
35 preferred. The amount of antifreeze preferably ranges from about 2% to about 9% by weight.

Biocides known to those skilled in the art may also be added, provided they are ashless. Antifoam agents known to those skilled in the art may be added as well, provided they are ashless. The
5 amount of antifoam agent preferably is not more than .0005% by weight.

The fuel composition may also include one or more coupling agents (hydrotropes) to maintain phase stability at high temperatures and shear pressures.
10 High temperature and shear pressure stability is required, for example, in compression ignited (diesel) engines because all the fuel delivered to the injectors may not be burned to obtain the required power load in a given cycle. Thus, some fuel may be
15 recirculated back to the fuel tank. The relatively high temperature of the recirculated fuel, coupled with the shear pressures encountered during recirculation, tends to cause phase separation in the absence of the coupling agent. Examples of preferred
20 coupling agents include di- and tri-acids of the Diels-Alder adducts of unsaturated fatty acids. A specific example of a suitable coupling agent is Diacid 1550, neutralized with an alkanolamine to form a water
25 soluble salt. Suitable alkanolamine neutralizers include amino methyl propanol triethanolamine, and diethanolamine, with amino methyl propanol preferred. The amount of the coupling agent typically ranges from about 0.04% to 0.1 % by weight, more preferably 0.04 to 0.05%.

30 The fuel composition additives may perform multiple functions. For example, Diacid 1550 acts as a surfactant, lubricant, and coupling agent. Similarly, AMP-95 acts as a neutralizer and helps maintain the pH of the fuel composition and ammonium
35 nitrate acts as a known cetane improver.

BBT020 24480760

A preferred fuel composition has the following composition: 67% by weight diesel, 30% by weight water, 2% by weight methanol, 0.16% by weight X-102; 0.08% by weight N1-5; 0.08% by weight TMN-10, 5 0.04% Diacid 1550, 0.06% AMP-95, 0.05% Synkad 828, and 0.37% 2-ethylhexylnitrate.

Emulsion Process

10 The preferred fuel emulsion compositions may be manufactured using any batch or continuous process capable of providing the shear rates necessary to form the desired droplet size of a stable emulsion.

In the batch process, the oil phase 15 ingredients (e.g., the hydrocarbon petroleum distillate and any other oil-soluble ingredients) are charged to a stirred tank reactor along with the surfactant. The aqueous phase ingredients (e.g., water and any other water-soluble additives) are 20 combined separately and then pumped into the reactor, where they are combined with agitation with the oil phase ingredients to form an emulsion. When the concentration of water has reached a sufficiently high level, phase inversion occurs, resulting in water 25 being the continuous phase.

The resulting emulsion is aged and then transferred from the reactor into a storage tank using a shear pump. The resulting product is a stable, homogeneous, milky emulsion having an average droplet 30 diameter less than about 10 microns, preferably ranging from about 4 to about 6 microns.

In an example of a continuous process, the ingredients (with the exception of the hydrocarbon petroleum distillate and the water) are combined in 35 the form of a stream, and then fed to a first in-line blending station where they are combined with a

SECRET 448060

hydrocarbon petroleum distillate stream. The resulting product is then combined with water in a second in-line blending station to form the fuel composition, which is then aged and pumped using a shear pump to a storage tank. As in the case of the batch process, the product is in the form of a stable, homogeneous, milky emulsion having an average droplet diameter of less than 10 microns, preferably ranging from about 4 to about 6 microns.

Examples of shear pumps capable of the necessary shear rates are the Ross X Series mixer and the Kady mill. A Kady Mill is preferred for manufacturing water continuous emulsions, running at between 20 Hz to about 60 Hz, preferably about 40 Hz.

Engine Design

The fuel compositions according to the invention can be used in internal combustion engines without substantially modifying the engine design. For example, the fuel compositions can be used without re-designing the engine to include in-line homogenizers. To enhance fuel efficacy, however, several readily implemented changes are preferably incorporated in the engine structure.

The capacity of the engine fuel system may be increased to use the fuel compositions in diesel engines. The increased capacity is a function of the percentage of water in the fuel. The engine fuel system capacity is typically scaled by the following ratio:

$$\frac{\text{Lower Heating Value of Diesel Fuel (btu/gal)}}{\text{Lower Heating Value of Fuel Composition (btu/gal)}}$$

In many cases, the engine fuel system capacity can be increased sufficiently by increasing the injector orifice size. Other engines may require an increase in the capacity of the injection pump. In addition, an increase in the capacity of the fuel transfer pump may be required.

Some modifications to the engine may be required to compensate for fuel compositions with cetane quality lower than diesel fuel. This may include advancing the fuel injection timing to improve operation at light load, during starting, and under warm up conditions. In addition, a jacket water aftercooler may be required to warm the intake air under light load conditions. The use of a block heater or an inlet air heater may be required to improve cold starting capability.

The following examples will further describe the invention. These examples are intended only to be illustrative. Other variations and modifications may be made in form and detail described herein without departing from or limiting the scope of the invention which is determined by the attached claims.

EXAMPLE 1

An fuel composition having the following formula was prepared:

	ppm	Percent
Diesel Fuel	(balance)	67%
H2O	300,000	30.00%
MeOH	20,000	2.00%
X-102	1,600	0.16%
N1-5	800	0.08%
TMN-10	800	0.08%

DA-1550	400	0.04%
AMP-95	600	0.06%
Synkad 828	500	0.05%
2-EHN	3,700	0.37%

The fuel composition was prepared by first mixing the Diacid 1550, AMP-95, Synkad 828, X-102, N1-5, and TMN-10 with the methanol.. The mixture was agitated.

5 The mixture was charged into a vessel with the reverse osmosis purified water and agitated for about 1-5 minutes. Then the Diesel Fuel and 2-ethylhexyl nitrate were charged into the vessel, and the composition was agitated for 15-30 minutes. The mixing
10 vessel was a Lightnin Blender, and all mixing was carried out under ambient conditions.

The fuel composition was then pumped through a Kady Mill shear pump at a rate of 40 Hz resulting in a homogeneous, milky emulsion having an average droplet
15 diameter of about 4 to about 6 microns. The fuel composition was stored at ambient temperatures.

EXAMPLE 2

A fuel composition was prepared by the method of
20 Example 1, having the formula:

Diesel Fuel	67%
Highly purified water	30%
Methanol	2.00%
2-EHN	0.37%
DA-1550	400 ppm
AMP 95	600 ppm
Synkad 828	500 ppm
N1-5	1000 ppm
NP 9	3000 ppm

EXAMPLE 3

A fuel composition was prepared by the method of Example 1, having the formula:

Diesel Fuel	67%
Highly purified water	30%
Methanol	2.00%
2-EHN	0.37%
DA-1550	400 ppm
AMP 95	600 ppm
Synkad 828	500 ppm
TMN 10	1000 ppm
NP 9	2000 ppm
17R2	100 ppm

5 EXAMPLE 4

A fuel composition was prepared by the method of Example 1, having the formula:

Diesel Fuel	67%
Highly purified water	30%
Methanol	2.00%
2-EHN	0.37%
DA-1550	400 ppm
AMP 95	600 ppm
Synkad 828	500 ppm
N1-5	1000 ppm
TMN 10	1000 ppm
CA 720	2000 ppm

10 For Examples 1 - 4: the diesel fuel was EPA Emissions Certification Diesel Fuel ; the water was purified by reverse osmosis; X-102 is Union Carbide

Triton X-102; TMN-10 is Union Carbide Tergitol TMN-10 surfactant; N1-5 is Shell Neodol N1-5 surfactant; DA-1550 is Atrachem Latol 1550 (or Westavco Chemicals Diacid 1550); AMP-95 is 2-amino-2-methyl-1-propanol; 5 Synkad 828 is Ferro Synkad 828; 2-EHN is Ethyl Corp. 2-ethylhexyl nitrate; CA-720 is Rhone-Poulenc "Igepal CA-720"; NP 9 is Shell "NP-9EO"; and 17R2 is BASF "Pluronic 17R-2".

10 EXAMPLE 5

The fuel compositions prepared according to Examples 1, 2, 3, and 4 were run in a diesel engine to monitor NOx and particulate emissions. The engine used was a Caterpillar 12 liter compression-ignited 15 truck engine (four stroke, fully electronic, direct injected engine with electronic unit injectors, a turbocharger, and a four valve quiescent head) The Caterpillar C-12 truck engine was rated at 410 hp at 1800 rpm with a peak torque of 2200 N-m at 1200 rpm 20 and was modified to run a fuel-in-water emulsion. A simulated air-to-air aftercooler (43°C inlet manifold temperature) was used.

The electronic unit injectors were changed to increase the quantity of fuel injected into the 25 cylinder. As modified, the electronic unit injector Caterpillar Part Number 116-8800 replaced the standard injector Caterpillar Part Number 116-8888. In addition, the electronic control strategy was optimized with respect to emissions, fuel consumption, 30 and cold starting.

Tests were performed on standard diesel fuels and on fuel emulsions of Example 1 and fuel emulsions prepared as in Example 1 in which the diesel fuel was Carb Diesel; RME (Rapeseed Methyl Ester); and Fischer 35 Tropisch diesel. The tests were performed at 1800 rpm and 228 kW, 122 rpm and 197 kW, and 1800 rpm and

152 kW. Particulate emissions and NOx+HC emissions for standard diesel fuels and for fuel emulsions are shown in the following table:

Engine		Standard diesel fuel	Fuel emulsions
1800 rpm 228 kW	Particulate emissions (g/hp-hr)	about 0.040 to about 0.055	about 0.025 to about 0.055
	NOx + HC emissions (g/hp-hr)	about 2.5 to about 4.5	about 1.0 to about 2.8
1200 rpm 197 kW	Particulate emissions (g/hp-hr)	about 0.03 to about 0.033	about 0.028 to about 0.1
	NOx + HC emissions (g/hp-hr)	about 3.5 to about 6.5	about 1.5 to about 4.2
1800 rpm 152 kW	Particulate emissions (g/hp-hr)	about 0.068 to about 0.084	about 0.038 to about 0.050
	NOx + HC emissions (g/hp-hr)	about 2.3 to about 4.5	about 1.1 to about 2.7

5

EXAMPLE 6

The Ball on Three Disks (BOTD) lubricity test was utilized to assess the lubricity of the fuel compositions. This test was developed by Falex Corporation to assess the lubricity of various diesel fuels and their additives. The average wear scar diameter is used to assess fuel composition lubricity; a smaller scar diameter implies a higher fuel composition lubricity. Typical diesel fuel will have a scar diameter of 0.45mm to 0.55mm. Fuel emulsions of Example 1 and fuel emulsions prepared as in Example 1 in which the diesel fuel was Carb Diesel; RME (Rapeseed Methyl Ester); and Fischer Tropsch diesel, ranged from about 0.547 to about 0.738.

10

15

094047.0799
067020/4450760

What Is Claimed Is:

1. A high stability, low emission, fuel
emulsion composition for an internal combustion engine
5 comprising

a) 26-50% purified water;

b) 50-74% hydrocarbon petroleum distillate;

said emulsion having an average droplet diameter of
less than about 10 microns.

10

2. The fuel emulsion composition of claim
1 wherein said emulsion has an average droplet
diameter of between about 4 microns and about 6
microns.

15

3. The fuel emulsion composition of claim
1 comprising 30 - 35 % purified water

4. The fuel emulsion composition of claim
20 1 wherein said purified water is purified using
reverse osmosis, distillation, or ion exchange
processes.

5. The fuel emulsion composition of claim
25 4 wherein said water is purified using reverse
osmosis.

6. The fuel emulsion composition of claim
1 wherein said hydrocarbon petroleum distillate is
30 high paraffinic having a aromatic content of less than
3%.

7. The fuel emulsion composition of claim
1 wherein said hydrocarbon petroleum distillate is
35 diesel fuel.

867020 24680450

8. The fuel emulsion composition of claim
1 further comprising:

- c) surfactant;
- 5 d) lubricant;
- e) corrosion inhibitor;
- f) antifreeze; and
- g) ignition delay modifier.

10 9. The fuel emulsion composition of claim
8 wherein said surfactant comprises
alkylphenoethoxylates, alcohol ethoxylates, fatty
alcohol ethoxylates, alkyl amine ethoxylates or
mixtures thereof.

15 10. The fuel emulsion composition of claim
9 wherein said surfactant is comprised of one or more
of the compositions selected from the group consisting
of Triton X-102; Tergitol TMN-10; Neodol N1-5; CA-720;
20 NP-9; and Pluronic 17R-2.

11. The fuel emulsion composition of claim
8 wherein said lubricant comprises one or more C_{12} to
 C_{22} backbone chains having an adducted acid, wherein
25 each said adducted acid is selected, independently
from the other, from the group consisting of mono-
phosphoric acid, di-phosphoric acid, tri-phosphoric
acid, mono-carboxylic acid, di-carboxylic acid and
tri-carboxylic acid.

30 12. The fuel emulsion composition of claim
11 wherein said lubricant further comprises an
alkanolamine neutralizer.

35 13. The fuel emulsion composition of claim

12 wherein said adducted acid is mono- di- or tri-carboxylic acid.

14. The fuel emulsion composition of claim
5 12 wherein said alkanolamine neutralizer is amino methyl propanol.

15. The fuel emulsion composition of claim
8 wherein said corrosion inhibitor is an aminoalkanoic
10 acid.

16. The fuel emulsion composition of claim
8 wherein said antifreeze is an organic alcohol.

15 17. The fuel emulsion composition of claim
16 wherein said antifreeze is methanol.

18. The fuel emulsion composition of claim
8 wherein said ignition delay modifier comprises one
20 or more compounds selected from the group consisting
of nitrates, nitrites and peroxides.

19. The fuel emulsion composition of claim
18 wherein said ignition delay modifier comprises
25 2-ethylhexylnitrate.

20. The fuel emulsion composition of claim
18 wherein said ignition delay modifier comprises
ammonium nitrate.

30

21. The fuel emulsion composition of claim
8 comprising 67% by weight diesel fuel, 30% by weight
purified water, 2% by weight methanol, 0.16% by weight
X-102; 0.08% by weight N1-5; 0.08% by weight TMN-10,
35 0.04% Diacid 1550, 0.06% AMP-95, 0.05% Synkad 828, and
0.37% 2-ethylhexylnitrate.

Abstract Of The Disclosure


HIGH STABILITY AQUEOUS FUEL COMPOSITIONS

5 Improved highly stable formulation for
aqueous fuel emulsion compositions with a water
continuous phase, having reduced NOx emissions. The
fuel emulsion formulation includes diesel fuel,
purified water, and an additive package that includes
10 one or more surfactants, lubricity additive, cetane
improver, anti-corrosion additive, and an alcohol or
other suitable antifreeze, the emulsion having an
average droplet size of less than 10 microns.

094044-2400760

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

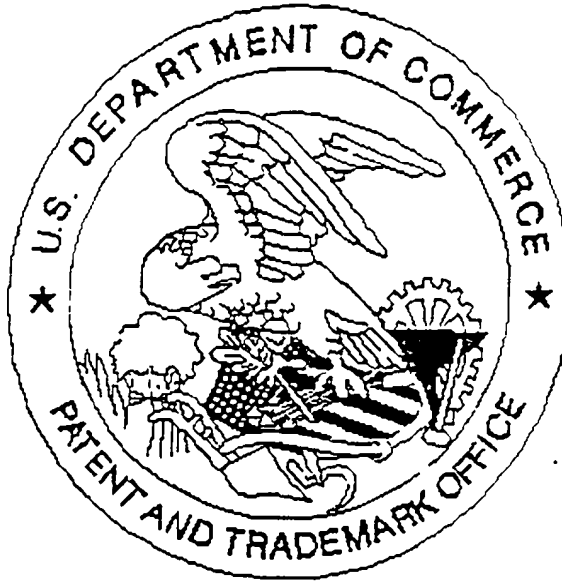

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR . 52 because:
 - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11" Pages _____ do not meet these requirements.
 - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
 - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
 - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
 - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11"
 - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) _____ are missing.
5. OTHER. NO Declaration ? NO Drawings